




# MORGRIP™ QUICK FLANGE



MORGRIP™ Quick Flange mechanical connectors for subsea use require no welding for pipeline repairs.

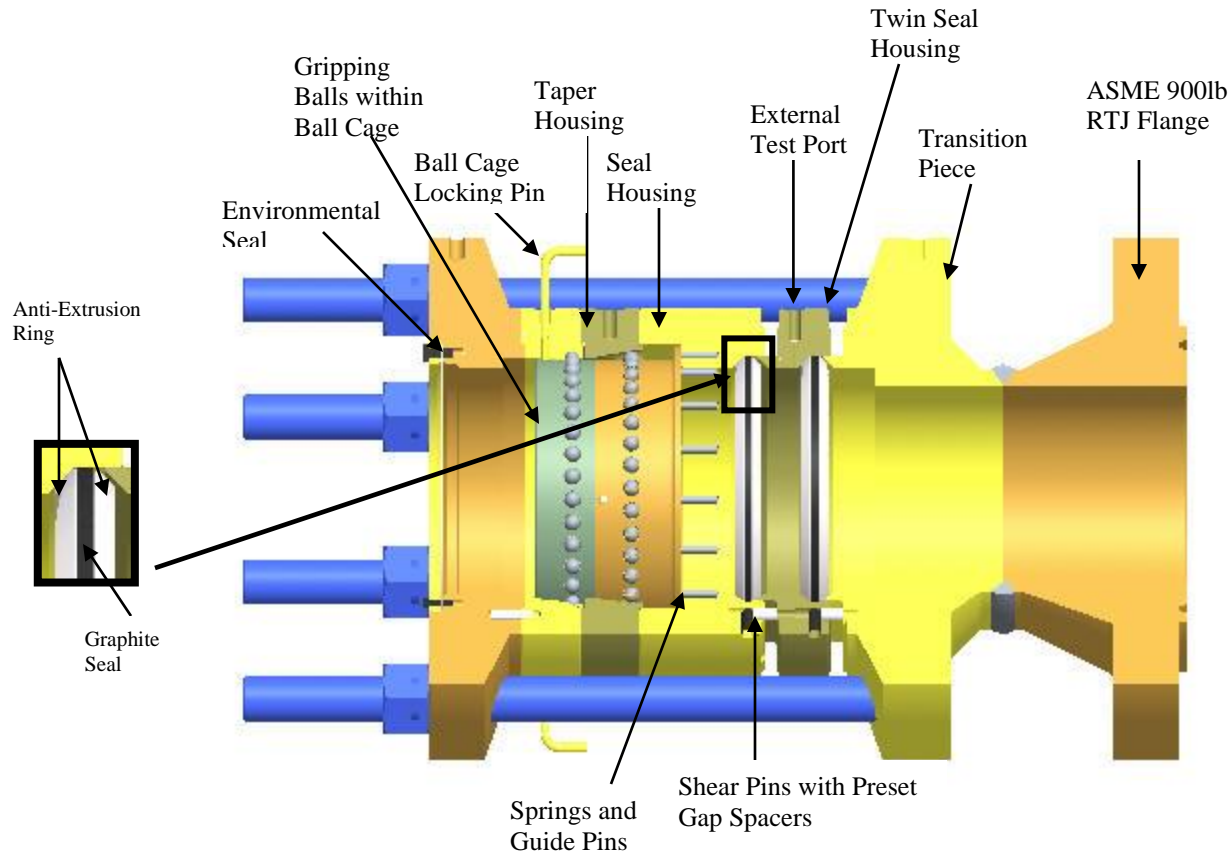

## STOCK AVAILABLE IN PASADENA TX:

- from 4" to 16" nominal bore size
- up to ASME 900lb pressure rating
- supplied with ASME 900lb RTJ mating flange
- designed to
  - API 6H
  - NACE MR0175
  - ASME VIII

## Quick and simple installation without a specialist technician:

1. No welding permits
2. Assemble to pipe and flange
3. External test
4. Start pipe operation



Visit the website at  
[www.morgrip.com](http://www.morgrip.com)